


INTERLINEAR FRAMEWORK

SPIRO framework

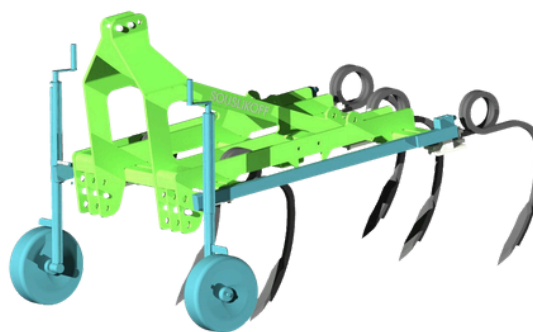

CHARACTERISTICS

- 25x25 square spiral teeth with ample space available.

Manual adjustment of the spacing between the two longitudinal components. 50x30 section side guides with 50x30 mounting supports for double (or alternative) discs.

Support bracket for a non-slip disc. Mounting of various instruments using clamps (optional). Hand-cranked depth measurement wheels, Ø320.



390 kg



1.60 m - 2.10 m
2m00 - 2m50
2m50 - 3m00

BENEFITS

- versatile

Genuine chance to gather a set of tools.

OPTIONS

- symmetrical hydraulic arrangement

Hydraulic lateral adjustment and spacing, various types of cage roller wheels.